SolarRoyal SR1800 Series

Specification Sheet

• Solar Panel:

35Watt High-efficient monocrystalline, 20.6 Volt, 1.7 Amp., impact resistance: 21mm at 51mph (23mps), $[w/Remote\ Panel = 65Watt]$

Motor:

Brushless 6-24VDC, proprietary, high-performance, optimized, direct current (DC) motor.

• Fan Blade:

12-inch/5-blade 'TurboProp' custom-styled nylon/polymetric blade.

Performance:

35Watt: Up-to 2955 sq.ft and ventilation, capacity up-to 1825 CFMs, sones $\approx .5 - 2.8$ 65Watt: Up-to 3555 sq.ft and ventilation, capacity up-to 2280 CFMs, sones ≈ .5 - 3.5

- Hood -(Upper Housing)

Ventilation Unit

-Rase/Flashing-

(Phillips) Wood Screw

Housing:

Upper: automotive grade ABS, high impact composite material, UV stabilizer with embedded fire retardant resin. Ventilation Unit

Base: System double-locks into upper housing. Solid one-piece aluminum (6061) base for easier installation & maintenance.

Model Info:

35Watt 65Watt Model #: SR1810 SR1865 Part Nr.: SRSF35W10 SRSF65W10 UPC: 638142929530 (+30W Remote Solar Panel Kit), #6 x 35mm Button-Head EAN: 0638142929530

• Unit Dimensions:

Unit Size/Weight: 24" x 24" x 7" / 26 Lbs Unit Box Size: 28" x 28" x 11" / 30 Lbs

• Lifetime Warranty Upgrade*:

Available online. (registered residential)

• Residential & Commercial (15 yr*)


Motor, solar panel and housing.

*Please review website for details related to items marked with an Asterisk, as well as for any updated information.








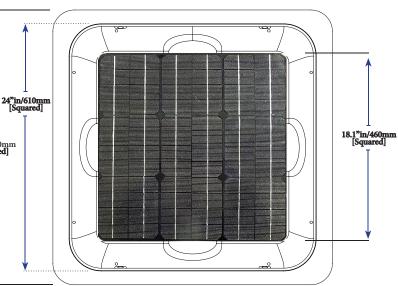

15"in/381mm Diameter Plywood Desk Typical Opening

24"in/610mm [Squared]



3.8"in/

15/32" Min